

ZHEJIANG WOLFGANG TECHNOLOGY CO., LTD					
浙江沃艾夫网科技有限公司					
MANUFACTURING PLANT	NO. 55, 329 NATIONAL HIGHWAY, XIAOYUE STREET, SHANGYU DISTRICT, SHAOXING CITY, ZHEJING PROVINCE 浙江省绍兴市上虞区小越街道329国道55号				
PRODUCT CATENA:	GB26-M70-400			VERSION	
产品系列:				版次	
PLASTIC NAME:	光面单盖	PLASTIC NO:		SCALE	1:1
制品名称:		制品编号:		比例	
MATERIAL:	PP	WEIGHT:		UNIT	MM
材料:		重量:		单位	
 FIRST ANGLE PROJECTION				APPROVE:	PAPER SIZE
				批准:	纸页

PRODUCT DATA SHEET

PRODUCT NAME: Glass Induction Liner

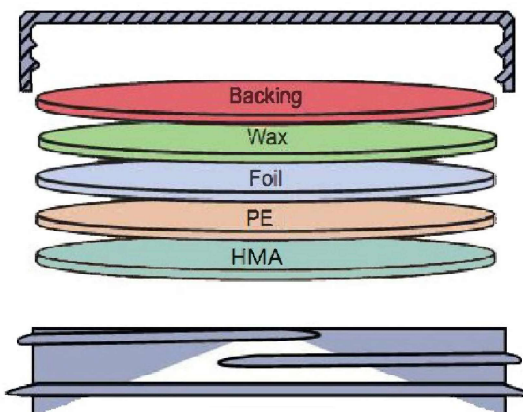
Product Description:

Glass liner is applied for Glass, PE, PP, PET and other material bottles (or jars) sealing by induction heating sealer. It has clean-peel feature after sealing.

Application:

Typically for food, sauce, pharmacy and daily chemical products, for example dry fruit, peanut butter, salt, cosmetic cream, and so on.

Composition:

Data		Figure
Layer	Thickness	
Backing (pulpboard)	0.5mm	
Wax	-	
Foil (AL)	0.02mm	
PE	0.04mm	
HMA	0.09mm	
Overall	0.65mm	

Product Value:

Odor: None detected	GTR: Near Zero
Taste: None detected	MVTR: Near Zero

Regulatory Compliance:

The glass induction liners complies with applicable Chinese Food Industry certificates regulations, for most food, beverage and pharmaceutical products.

Storage and Handling:

Transportation or storage temperature should not exceed 40°C. Avoid exposing to direct sunlight. For best results, wait 48 hours at recommended storage conditions before processing. Do not exceed 12 months of storage from manufacturing date. Recommended sealing temperature is around 130~190°C.